


MiniBlue™ Hot Melt Dispensing Guns



Compact hot melt guns maximize mounting and pattern flexibility in confined spaces.

MiniBlue guns:

- Require minimal space for installation and service
- Produce self-cleaning action and improved cutoff
- Are available in reduced cavity and ball and seat configurations
- Feature the new* EasyOn™ module design for faster installation

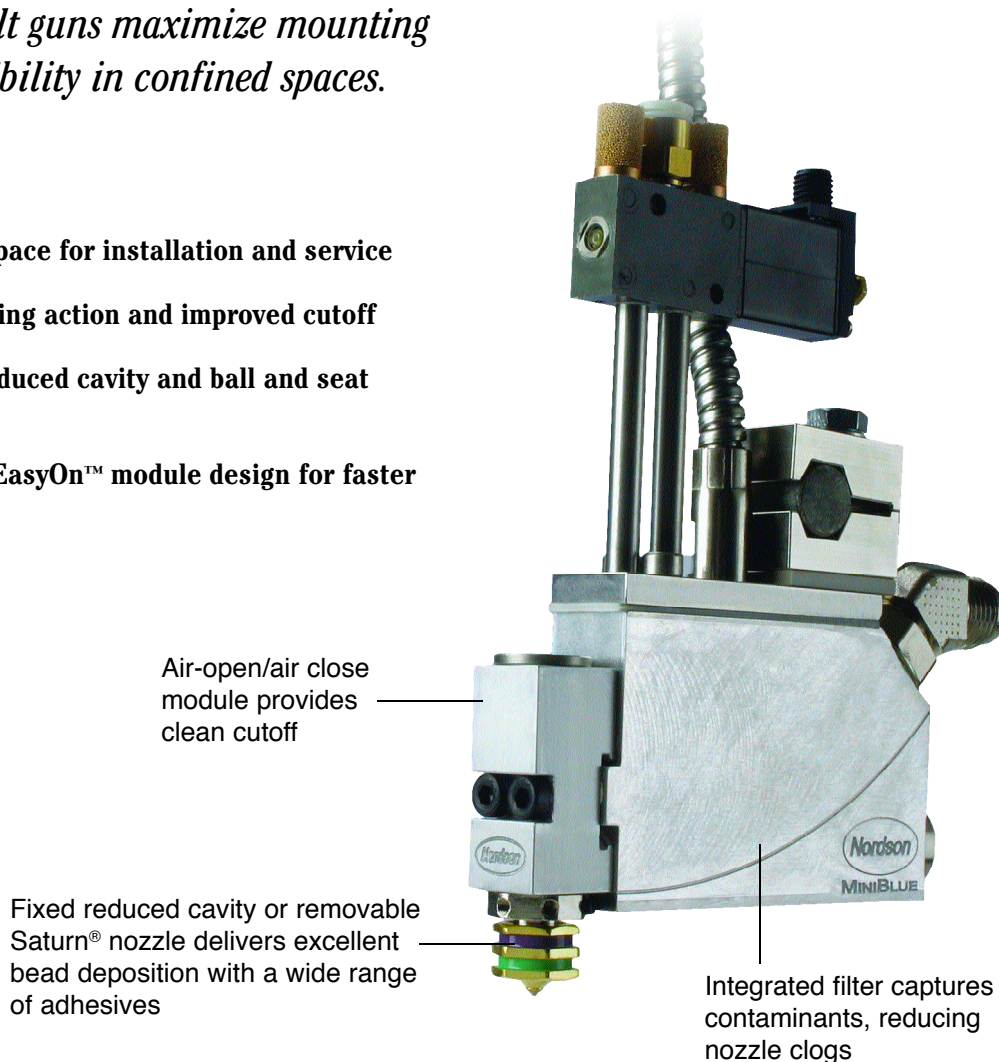

Nordson MiniBlue guns are ideal for applications with close flap compression sections. Close multi-module centerlines as small as 16 mm (0.63 in) extend mounting and pattern flexibility in confined spaces. Single module MiniBlue guns offer a 18 mm (0.71 in) wide manifold.

Compact and configurable, Nordson MiniBlue guns are available with a choice of ball and seat or reduced cavity gun modules.

Two spring-loaded seals extend module operating life and reduce air section failure. These long-life hydraulic seals help improve durability and minimize maintenance and downtime.


MiniBlue modules feature air-open/air-close (AO/AC) actuation, providing a strong closing force to minimize adhesive stringing, especially with aggressive and pressure sensitive adhesives.

In addition, EasyOn technology provides:


- Guided, one-way fit (mated module and gun body surfaces)
- Easier, safer installation (especially on gun bodies located deep within machines)
- Modules fit existing Nordson gun bodies (backward compatibility)
- Simpler design

** Patent applied for*

MiniBlue Gun Hot Melt Dispensing Guns

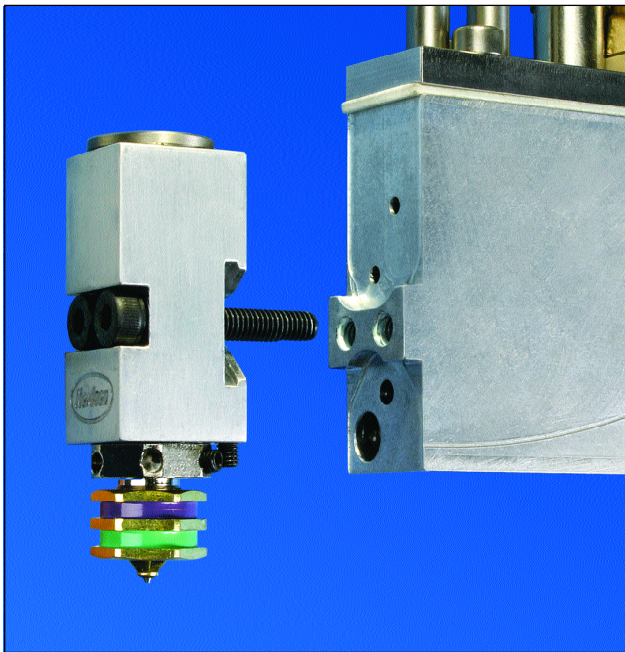

New EasyOn design reduces installation and maintenance time

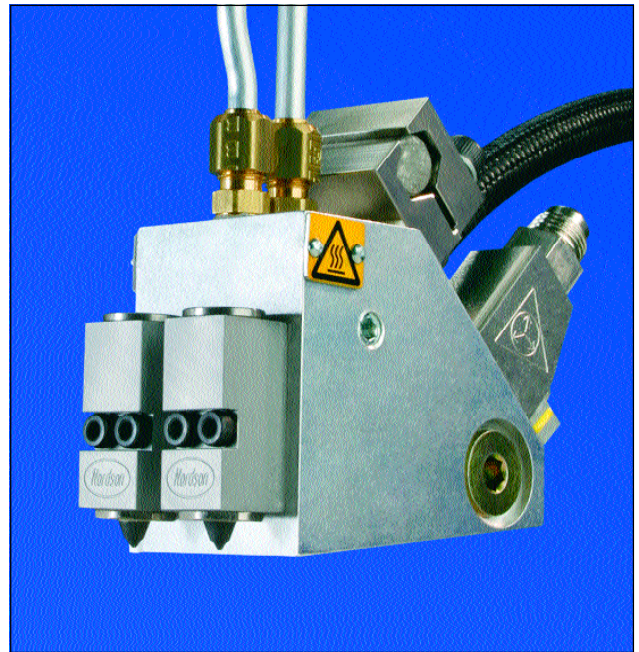

MiniBlue 2, dual-module gun with reduced cavity modules

Specifications


Operating Temperature	230° C (450° F) maximum
Operating Air Pressure¹	3.4 to 5.5 bar (50 to 80 psi)
Working Hydraulic Pressure	103 bar (1500 psi) maximum
Nozzles Standard	Saturn, single orifice (controlled engagements)
Nozzles Reduced Cavity²	0.20, 0.30, 0.41, 0.51 mm (.008, .012, .016, .020, in)
Solenoid Valves³	Nordson 24 VDC high-temperature solenoids factory installed
Electrical Service	240 VAC, 50/60 Hz; 200 VAC, 50/60 Hz opt

Notes:

¹ Recommended range. Dry, regulated, unlubricated air required for consistent gun operation.

² Nozzles are integrated into the MiniBlue RC module

³ Nordson specifies 24 VDC high-temperature valves for pattern accuracy and extended service life. Minimum recommended capacity is 0.8 Cv



18 mm (0.71 in) width fits in confined spaces



For more information, talk with your Nordson representative or contact your Nordson regional office.

United States

Duluth, Georgia

Telephone: (800) 683-2314

Toll-free Facsimile:

(866) 667-3329

Canada

Markham, Ontario

Telephone: (800) 463-3200

Facsimile: (905) 475-8821

Europe

Lüneburg, Germany

Telephone: (49) 4131-894-0

Facsimile: (49) 4131-894-149

Japan

Tokyo, Japan

Telephone: (81) 3-5762-2700

Facsimile: (81) 3-5762-2701

Asia/Australia/ Latin America

Amherst, Ohio

Telephone: (440) 985-4797

Facsimile: (440) 985-1096

www.nordson.com



When you expect more.[®]